


SABRE

PERCOLATING FIRE HOSE

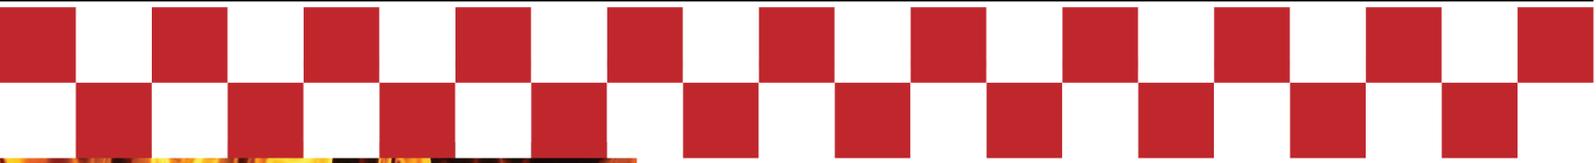

Inside Diameter	Mass per Meter	Short Length Burst Pressure	Recommended Working Pressure	30m Coil Diameter
25mm	0.15 kg	5500 kPa	2000 kPa	0.34 m
38mm	0.22 kg	3500 kPa	1500 kPa	0.39 m
45mm	0.24 kg	3500 kPa	1500 kPa	0.40 m
51mm	0.27 kg	3500 kPa	1500 kPa	0.41 m
65mm	-	-	-	-
76mm	-	-	-	-
90mm	-	-	-	-
102mm	0.50 kg	2500 kPa	1000 kPa	0.54 m

Features

- ✓ Mildew resistant
- ✓ Maintenance free
- ✓ Ready for mounting
- ✓ Can be stored wet
- ✓ Versatile
- ✓ Other fittings available
- ✓ Working pressure 1500kPa
- ✓ Class M

SABRE is a filament polyester percolating fire hose. This is a layflat percolating fire hose which allows precision engineered seepage of water under pressure through the hose fabric jacket. This percolating features forms a water barrier on the hose jacket which protects the hose against the effect of heat and glowing embers.

SABRE M Class type fire hose is lightweight yet sturdy construction enables fire fighters to take this hose into dense bushfires, transporting the hose in backpacks. The hose is fully synthetic thus making it mildew resistant. As a result this hose is maintenance free so no drying is required after use.

Depending on types of fires, you can choose from 3 grades of percolations:

- LP - Low Percolation
- MP - Medium Percolation
- HP - High Percolation

SABRE hose is manufactured in Australia to AS2792 Standard.



Crusader Hose Pty Ltd

22 Industry Place Bayswater VIC 3153 Australia
 Telephone: (03) 9720 1100 Facsimile: (03) 9720 5756
 Email: sales@crusaderhose.com.au
 www.crusaderhose.com.au

