


Swaging

Fitting method for layflat hose

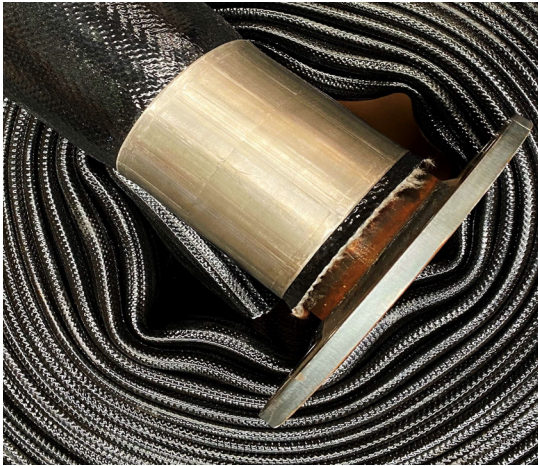

Swaging (also known as crimping), a common fitting method for high-pressure hydraulic hose, is the locking interface between hose and coupling.

Swaging is also a safe and secure attachment method for layflat hose. It is growing in popularity due to its cost-efficiency. Our recent investment in machinery has given Crusader Hose the capability to swage couplings in-house. **Swaging** is available for hose diameters from 25 mm to 203 mm and is an ideal fitting choice.

Crusader Hose are specialists in providing the best fitting service for your requirements and take pride in our excellent workmanship. You can be confident that our securely-fitted couplings will handle the rigours of daily use. We regularly test hose assemblies to ensure they won't leak or blow off.

IDEAL FOR

- High-pressure applications
- Large diameter range
- Rapid turnaround

FEATURES

- ✓ Securely-fitted couplings
- ✓ Rigorous testing methods
- ✓ Specialist fitting service
- ✓ Certificates issued
- ✓ Peace-of-mind pumping
- ✓ Excellent workmanship



Flange coupling and ferrule ready for swaging



Swaging machine



Swaged coupling



Rigorous testing



Scan here to learn more about our fitting & testing service

Crusader Hose Pty Ltd

22 Industry Place, Bayswater VIC 3153 Australia
e: sales@crusaderhose.com.au p: +61 3 9720 1100

www.crusaderhose.com.au

v.0222

