

PETROLINE

AUSTRALIA'S LEADING FUEL LAY-FLAT HOSE



CRUSADER HOSE

We manufacture in Australia
the world's best layflat hose



PETROLINE

AUSTRALIA'S LEADING FUEL LAY-FLAT HOSE



Projects



Petroline's customer base includes the Defence Force, the Oil and Gas Industry as well as a variety of fuel handling operators.

Recent Petroline Projects

- ✔ Supply of hose for ship-to-shore de-bunkering at Christmas Island.
- ✔ Supply of hose and equipment for the Army's bulk fuel distribution: This project provides the Defence Force with the capability to transfer fuel for military and aviation needs very rapidly over considerable distances.

Crusader Hose has supplied several kilometres of 150mm Petroline complete with a custom designed and built hose reeling system.

Main Uses



- ✔ Delivery Hose suitable for use with fuels and chemicals
- ✔ Temporary fuel pumping
- ✔ Compactly stored for refueling of ships
- ✔ Applications in fuel terminals and depots



PETROLINE

AUSTRALIA'S LEADING FUEL LAY-FLAT HOSE



Typical Fittings



Crusader Hose recommends the use of Petroline couplings in most applications. Various coupling types are suitable for use with this hose. The anti-static wire is earthed to each coupling end.

We typically attach the coupling using the wire whipping method. This tight "wrapping" technique keeps the couplings on at very high pressures. This is very important as leaks at high pressures are not only wasteful but can also be dangerous. We offer a further testing service whereby the entire hose assembly is certified to high pressure.



Petroline Features




- ✔ Lightweight & easy to handle
- ✔ High pressure rating
- ✔ Good resistance to fuel and chemicals
- ✔ Requires small storage space; easy to roll up
- ✔ Available in different colours
- ✔ Prompt delivery times and customer support
- ✔ UV stabilised; consequently suitable for extended outdoor use
- ✔ Anti-static copper wire built in for electrical continuity



PETROLINE

AUSTRALIA'S LEADING FUEL LAY-FLAT HOSE

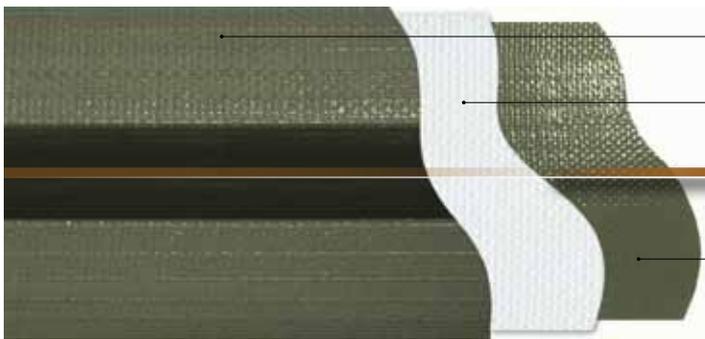

Non-cracking polyurethane cover

Woven polyester fabric

Built-in copper anti-static wire

Impregnated polyurethane bonded to outer cover which eliminates separation

The woven polyester fabric jacket gives the hose its high bursting and tensile load features. The polyurethane cover not only protects the hose against abrasion damage but also against harmful UV radiation and ozone. This unique design renders the hose light weight yet extremely strong and durable.

Hose Size Diameter (mm/inch)	Internal Diameter (mm)	External Diameter (mm)	Recommended working pressure (kPa) (4:1 safety margin)	Burst Pressure (kPa)	Weight (kg/m)
40mm / 1½"	40.0	42.0	950	3800	0.40
50mm / 2"	50.0	54.0	1850	7400	0.55
64mm / 2½"	64.0	42.0	950	3800	0.40
75mm / 3"	76.0	80.0	1450	5800	0.95
100mm / 4"	102.0	106.0	1250	5000	1.40
150mm / 6"	152.0	156.5	1100	4400	2.5

Standard lengths are 100m and 200m, but hoses can be supplied to customer requirements.

Petroline Certifications

- ✓ Manufactured to ISO 9001.
- ✓ Complies with AS2683 section 2.
- ✓ Complies with AS2001.28 - UV and abrasion tests.



Crusader Hose Pty Ltd

22 Industry Place Bayswater VIC 3153 Australia
Telephone: +61 3 9720 1100 Facsimile: +61 3 9720 5756
Email: sales@crusaderhose.com.au
www.crusaderhose.com.au

