

FLEXIDRAG

Premium Irrigation Layflat Hose

World Leading Quality

- ✓ Suitable for laterals or winch irrigation.
- ✓ Ultra-Durable.
- ✓ Versatile and UV stabilized.
- ✓ Quality Tested.
- ✓ Fully backed up by warranty.



CRUSADER HOSE
Customised Layflat Hose Systems

Crusader Hose Pty Ltd
22 Industry Place, Bayswater VIC 3153 Australia
Telephone: (03) 9720 1100

www.crusaderhose.com.au
For any enquiries, email sales@crusaderhose.com.au

FLEXIDRAG

Premium Irrigation Layflat Hose


The FLEXIDRAG is a high quality linear move or travelling irrigator hose. It is manufactured by weaving a high tensile polyester jacket and encapsulating this with abrasion resistant polyurethane. Our technically advanced annealing process gives a finishing treatment to this layflat hose, making it world's best standard. The Flexidrag is able to withstand high pressures on guns as well as remain flexible at low pressures on linear irrigators.

The Flexidrag is made in a large range of diameters from 40mm to 152mm and available in lengths up to 300m continuous. We proudly manufacture the hose in Australia ensuring that we include UV stabilisers in order to withstand the extremely high UV conditions.

Each roll of Flexidrag is fully tested at our factory prior to despatch to the farm. In case of failure, the hose is covered by a 10 year pro-rata warranty, backed up by our established and reputable company.

Ideal for:

- Laterals, Linear, Boom & Travelling Irrigators
- Winch irrigation
- Effluent pumping
- Dewatering, Water Bypass & Potable Water applications

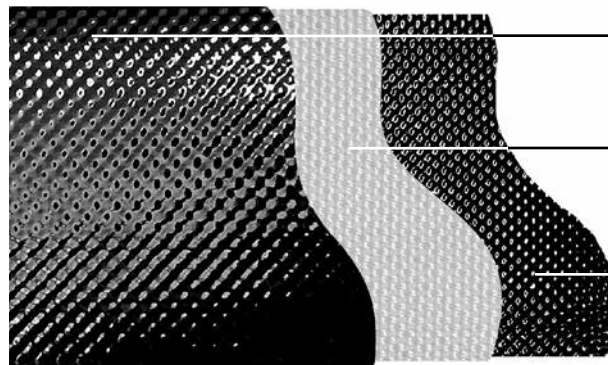


Annealed polyurethane cover

New improved Woven fabric

Impregnated polyurethane lining bonded to outer cover which eliminates separation

Inside Diameter (mm)	Inside Diameter (inch)	Working Pressure (bar)	Burst Pressure (bar)	Burst Pressure (psi)	Bend Radius @ 30 psi (m)	Tensile Load Tonnes	Avg. Single Wall Thickness (mm)	Weight per metre (Kg)
40	1.5"	20	40	580	0.6	4	2.2	0.50
50	2"	20	40	580	0.6	4.5	2.4	0.60
64	2.5"	20	40	580	0.7	4	2.6	0.65
76	3"	20	40	580	0.8	4.5	2.7	0.80
90	3.5"	20	40	580	0.9	6	2.8	0.95
102	4"	20	40	580	1.1	7	3.2	1.00
114	4.5"	17	35	507	1.3	9	3.4	1.30
127	5"	17	35	507	1.5	12	3.6	1.50
152	6"	17	35	507	1.7	14	4.0	1.80



Authorised Distributor



www.crusaderhose.com.au