


SABRE

NEW

Percolating Fire Hose

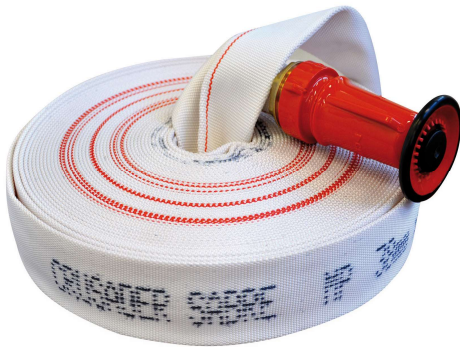

Features:

- ✓ Percolating fire hose
- ✓ Working Pressure 2100 kPa
- ✓ Type 2
- ✓ Class H
- ✓ Easy to handle by anyone
- ✓ Mildew resistant for long life
- ✓ Easy operation & maintenance
- ✓ 12-months warranty



Inside Diameter	Mass per Metre	Minimum Burst Pressure	Recommended Working Pressure	30m Coil Diameter
25mm	0.16 kg	5250 kPa	2100 kPa	0.36 m
38mm	0.23 kg	5250 kPa	2100 kPa	0.40 m
51mm	0.28 kg	5250 kPa	2100 kPa	0.42 m
64mm	0.35 kg	5250 kPa	2100 kPa	0.48 m
65mm	0.35 kg	5250 kPa	2100 kPa	0.48 m

Sabre® is the original percolating hose made by Crusader Hose. This layflat percolating fire hose allows seepage of water under high pressure through its precision-engineered fabricated jacket. A water barrier is formed on the jacket by this percolating feature offering protection against the effect of heat and glowing embers.

Sabre® is an H Class fire hose with 2100 kPa working pressure and available in 25mm to 65mm diameter. This woven fire hose is made from filament polyester with a synthetic PVC/nitrile lining. The lining is mechanically perforated for even seepage along the entire length.

The Type 2 **Sabre®** hose is offered in 3 percolation grades to suit a range of fire types:

- LP - Low Percolation (Standard)
- MP - Medium Percolation
- HP - High Percolation

Sabre® is manufactured in Australia by Crusader Hose in our ISO 9001 quality-accredited factory. Like all fire hose made by Crusader Hose, **Sabre®** comes with a standard 12-month warranty against manufacturing faults.



Crusader Hose Pty Ltd

22 Industry Place, Bayswater VIC 3153 Australia

E: sales@crusaderhose.com.au P: +61-3-9720 1100

W: www.crusaderhose.com.au